

### Basic tools



Tape measure



Screwdrivers



Adjustable wrenches



Hacksaw & handsaw.



Teflon tape



Glove

### Advance tools



Basin spanners.



caulking gun



Vise grip pliers.



Claw ball-pen hammers.



Hammer.



Sink tap spanner.




Product is fragile. To avoid breakage and possible injury handle with care. Picture may not exactly define.


### STEP:1 REMOVE OLD TOILET

- A. Close toilet supply valve and flush tank completely. Towel remaining water from tank and bowl
- B. Disconnect and remove supply line. (If replacing valve first shut off main water supply.)
- C. Remove old mounting hardware & toilet and plug floor waste opening to prevent escaping sewer gases.
- D. Remove closet bolts from flange and clean away old Wax, putty etc. from base area.


### STEP:2 ROUGHING IN DIMENSIONS

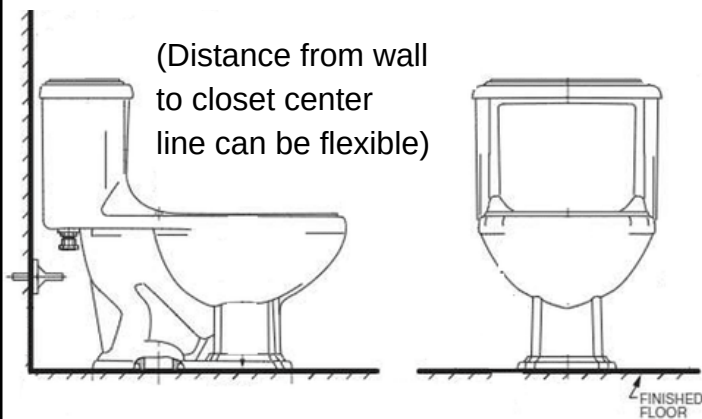

### STEP:3 INSTALL CLOSET BOLTS

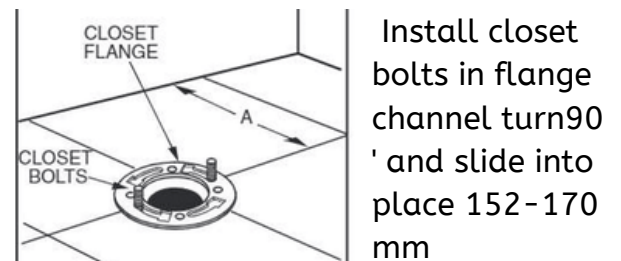


### STEP:4 INSTALL WAX SEAL

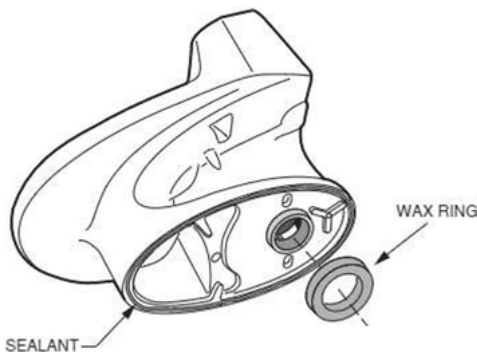

1. Invert toilet on floor (cushion to prevent damage)
2. install wax ring with tapered end of ring facing toilet. Apply a thin bead of sealant around toilet base.

### STEP:5 POSITION TOILET ON FLANGE

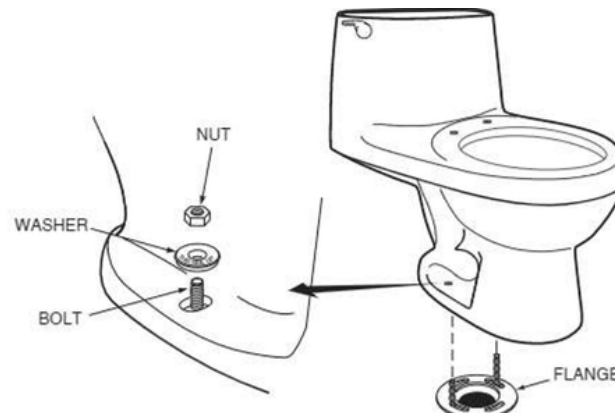


1. install toilet on closet flange so bolts project through mounting holes.
2. Loosely install retainer washers and nuts. Side of washers marked "This side up" must face up!



Product is fragile. To avoid breakage and possible injury handle with care. Picture may not exactly define.

### STEP:6 INSTALL TOILET

Do not over tighten nuts more than required for a snug fit

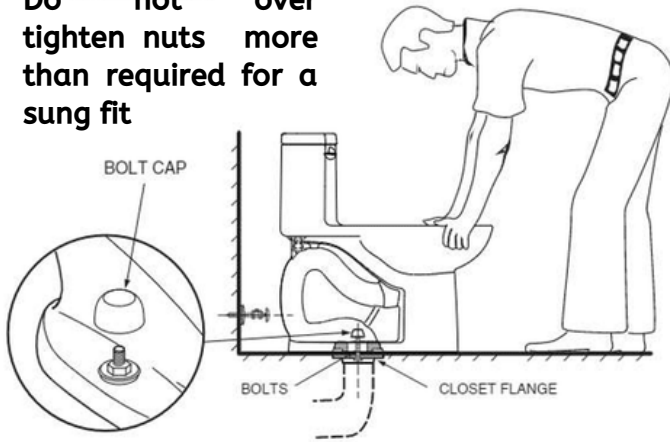

1. Position toilet squarely to wall, press bowl down fully on wax ring and flange.
2. Tighten nuts toilet.
3. Install caps on washers.
4. Smooth off the sealant around Base.

### SUPPORT


JAAZ CORPORATION PVT. LTD.  
406 Onyx, Akshar Cross Road,  
O. P. Road, Vadodara - 390 020.  
Gujarat. INDIA

+91 9408630765

+91 2652280178


Write to us at:  
support@jaaz.in  
www.jaaz.in

### STEP:9



tighten coupling nut 1/4 turn beyond hand tight

Turn on water supply. Submerge the float cup under the water for 30 sec.

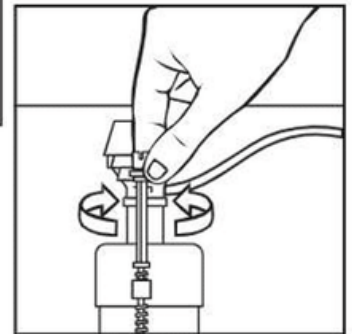

### ENTIRE SYATEM

